



ADDISON TECHNOLOGY


Coastal House, 180 Bridge Road, Southampton, England S031

Tel: (44) 1489 556957

Fax: (44) 1489 556931

Product
Specification

DATA PATCH CORD SOLUTION

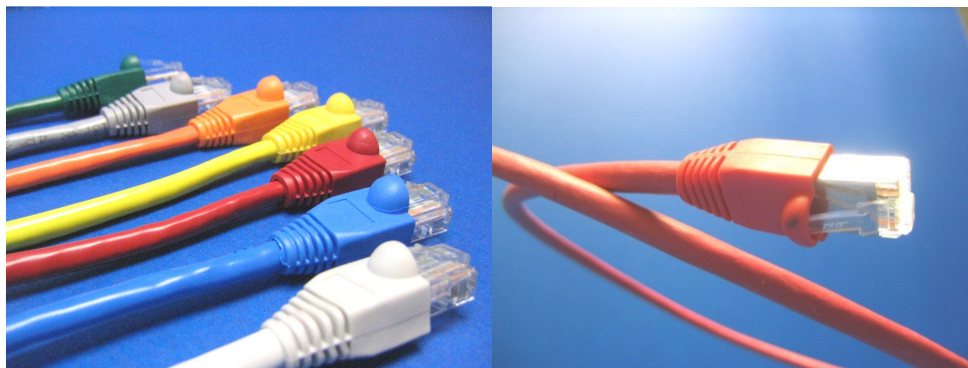

AD-CAT5EUTP4PM003CM24AWG01

UTP CAT5E 4Pair 24AWG PVC Patch Cord 3Meter Yellow Color

AD-CAT6UTP4PM003LH24AWG01

UTP CAT6 4Pair 24AWG LSOH Patch Cord 3Meter Yellow Color

CAT 5e Patch Cords are 100% tested to Cat 5e specs

CAT 6 Patch Cords are 100% Cat 6 component performance tested, Onyx Grip - strain relief ensures mechanical and electrical stability, TIA/EIA 568-B.2-1 Cat 6 compliance, Straight - thru pair orientation, Slimline strain relief boot, 24 AWG Stranded conductor cable with cross-web separators, & Backward compatible - Cat 3, 5, & 5e component compliant.

Comments

Copper Patch Cord Cat 6 & 5e: Category 6 patch/equipment cords and Category 5e Extended Frequency System (EFS) patch/equipment cords are 100% performance tested as a network component to ensure stability and performance through every move, addition or change. test methods are even under consideration for use as a TIA standard. Addison patchcords protect the integrity of this communication connection point.

Support Specifications

CAT 5E / EFS SPECS: Supports Voice, 155/622 Mbps ATM, 270 Mbps digital video, 4/16 Mbps Token Ring, 100 Mbps TP-PMD, Supports 10BASE-T Ethernet, 100BASE-TX Fast

United Kingdom *United States * Singapore * Hong Kong * China *Japan * Philippine

Addison Website: www.addison-tech.com

Please contact webmaster@addison-tech.com for any further clarifications.



ADDISON TECHNOLOGY

Coastal House, 180 Bridge Road, Southampton, England S031

Tel: (44) 1489 556957

Fax: (44) 1489 556931

Product
Specification

DATA PATCH CORD SOLUTION

Ethernet, Supports 1000BASE-T Gigabit Ethernet, and Broadband video.

Options

AD-AAAAA-BBB-CCC-D-EEE-FFF-GG-HH

****HH**** Jacket Color

01-Yellow; 02-Blue, 03-Green, 04-White

05-Orange, 06-Purple, 07-Red, 08-Grey

Color code ended with A-IMAC coloring (For example: 01A)

****GG**** Cable Gauge Size

24A -24 AWG, 26A- 26 AWG

****FFF**** Fire Performance Rating

CM - Normal PVC, CM grade

CMR - FRPVC , CMR Riser Grade

CMP - FEP, CMP Plenum Grade

FR - FRPVC, to IEC 332-3C

LH - LSOH grade, to IEC 754-1, IEC 1034 P1/2

****EEE**** Length

F003 - 3 Feet, F005 -5 Feet, F007 - 7 Feet,

M001 - 1 Meter, M002 -2 Meter, M003 - 3 meter,

****D**** Length Unit

F-Foot or M-Meter

****CCC**** No of cable pairs

4P- 4 pairs, 25P- 25 pairs

****BBB**** Cable Type Family

UTP - Unscreened Cable

FTP- Overall Screened Cable

****AAAAA**** Cable Standard

CAT3/CAT5/CAT5E/CAT6

United Kingdom *United States * Singapore * Hong Kong * China *Japan * Philippine

Addison Website: www.addison-tech.com

Please contact webmaster@addison-tech.com for any further clarifications.